



ASTRO-WHITE I

Technical Data	
Thickness:	2/16" (nominal)
Weight:	0.811 oz per sq ft
R-Value:	14.5 (Down), 7 (Horiz), 4.9 (Up)
U-Value:	0.771 (down), 0.109 (Horiz), 0.119 (Up)
Reflectivity:	96% - 97%



For use in:

Agricultural and commercial buildings including metal structures.


For use as:

1. A condensation barrier in heated or unheated commercial buildings used for warehousing, poultry and animal confinement.
2. A radiant barrier in unheated commercial buildings used for warehouse and animal confinement.
3. As a "white" facing for ceiling applications in commercial buildings...an excellent alternative to white vinyl-faced fibreglass batt.

Construction:

White•Bubble•Foil - 99% Pure Polished Aluminum Foil 0.00025 inch. Polyethylene White Bubble, 3/16 inch

Astro-White I reflective foil insulation consists of a layer of white polyethylene bubble film with a layer of 99.9% pure aluminium foil on one side making a structure 3/16-inch thick. An economical condensation barrier and reflective foil insulation designed for heated and unheated commercial and agricultural buildings. **Astro-White I** will reduce heat gain, form a wind and vapour barrier, reduce condensation, and is bird, insect and rodent resistant.

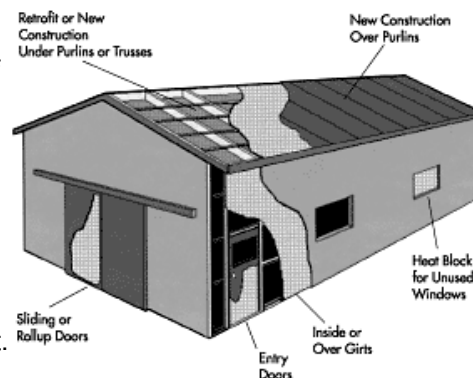

Standard roll size: 4 feet x 125 feet (46.5 m²).



Astro-Foil UK, 3-4 Eastwood Court, Broadwater Road, Romsey, SO51 8JJ
www.astrofoil.co.uk

Astro-Foil UK is a trade name of Import Supplies Direct Ltd. Registered in England and Wales
 Company No. 04391037